







Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification




The Application of Occasions

Suitable places: Wall.

Product Description

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver , ensure the light source is maximum used.





	Lamp	Lumen	A	В
GL16101	LED 20W	2000LM	250	265
	E27 23W			
GL16102	LED 12W	1200LM	150	160

01/02



Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used,






	Lamp	Lumen	A	В	C
GL16103	LED 12W	1200LM	230	60	55











Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color


Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification




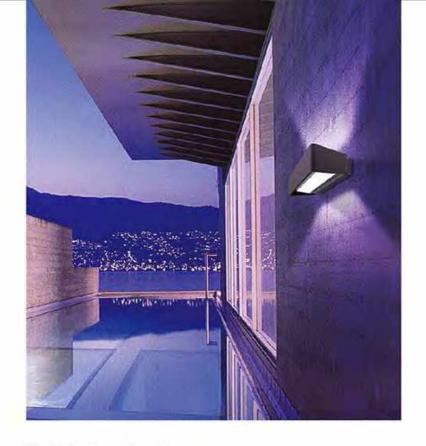

The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver , ensure the light source is maximum used.





	Lamp	Lumen	A	В	C
GL16104	LED 12W	1200LM	248	115	70









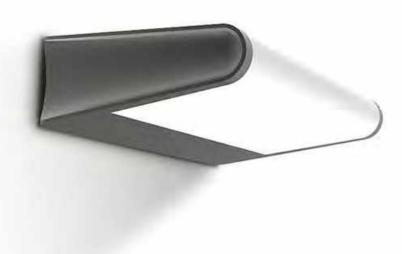

Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 @BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall.


- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This tamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL16105	LED 12W	1200LM	200	130	50















Silver Gray Dark Gray Black



Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL16106	LED 12W	1100LM	169	219	55











Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification


€ RoHS ISO9001-2008 BSCI

ERP Certification

The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL16107	LED 12W	1200LM	175	202	40













Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification



The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL16201	LED 12W	1200LM	250	250	50





Lighting Technology
Luminaires with LED
with LED integral power supply unit

Color temperature 2700K-6500K


Protection class IP65

Material PC, Diffuser

Body color Black, Dark Gray, Silver Gray

CERP Certification




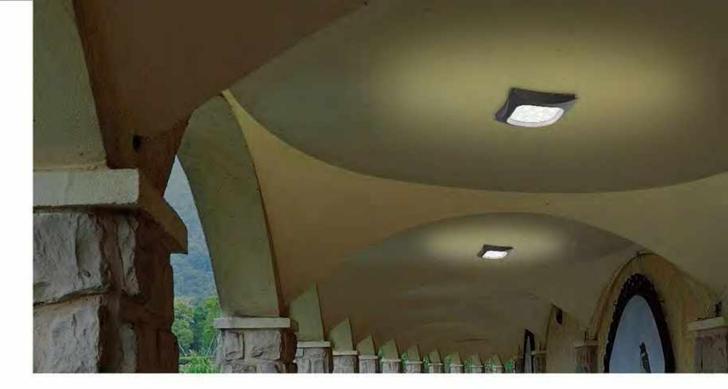

The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.




	Lamp	Lumen	A	В
GL16202	LED 12W	1200LM	243	44



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- The lamp body is made of aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. Lamp light source fix with E27 / B22 energy saving lamp, Max. 18W.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP44.



	La	mp	A	В	
GL16301	E27	23W	120	300	
GL16302	E27	23W	120	500	
GL16303	E27	23W	120	800	
GL16304	E27	23W	210	226	





Lawn Light

Lighting Technology

Luminaires with E27/B22 lamp holder fixed with energy saving lighting Max.18W

Protection class

1P44

Material

Atuminium Attoy Diffuser PC

Body color

Black, Dark Gray, Silver Gray

Certification


€ RoHS ISO9001-2008 BSCI



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The tamp body is made of aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. Lamp light source fix with E27 / B22 energy saving lamp, Max. 18W.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP44.



	Lamp	Lumen	A	В
GL16401	LED 10W	1000LM	120	300
GL16402	LED 10W	1000LM	120	500
GL16403	LED 10W	1000LM	120	800
GL16404	LED 10W	1000LM	138	170











Lawn Light

Lighting Technology

Luminaires with E27/B22 lamp holder fixed with energy saving lighting Max.LED 12W/23W

Protection class

1P54

Material

Aluminium Atloy Diffuser PC

Body color

Black, Dark Gray, Silver Gray

Certification


€ RoHS ISO9001-2008 6 BSCI



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body is made of aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. Lamp light source fix with E27 / B22 energy saving lamp, Max. LED 12W/23W.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP44.



	Lamp	Lumen	A	В
GL16501	LED 12W	1200lm	120	300
	E27 23W			
GL16502	LED 12W	1200lm	120	500
	E27 23W			
GL16503	LED 12W	1200lm	120	800
	E27 23W			
GL16504	LED 12W	1200lm	138	250
	E27 23W			






















Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

C€ RoHS ISO9001-2008 ■BSCI

ERP Certification



The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver , ensure the light source is maximum used.



	Lamp	Lumen	A	В	C	
GL15101	LED 10W	1100LM	240	120	45	





Lighting Technology
Luminaires with LED
with LED integral power supply unit

Color temperature 2700K-6500K

Protection class IP65

Material
PC, Diffuser, Die-casting Aluminium

Body color Black, Dark Gray, Silver Gray

Certification
CE RoHS ISO9001-2008 BSCI
ERP Certification






The Application of Occasions

Suitable places: Wall,

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver , ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL15102	LED 12W	1200LM	236	114	68



Silver Gray Dark Gray Black

LED Wall Light

Lighting Technology Luminaires with LED with LED integral power supply unit

Color temperature 2700K-6500K

Protection class

Material
PC, Diffuser, Die-casting Aluminium

Body color Black, Dark Gray, Silver Gray

Certification

(E RoHS ISO9001-2008 BSCI

ERP Certification




The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.





	Lamp	Lumen	A	В	C
GL15103	LED 12W	1200LM	200	200	180



Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

Die-casting Aluminium, Temered glass

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification





The Application of Occasions

Suitable places: Wall,

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.





	Lamp	Lumen	Α	В	C
GL15104	LED 3.5W	160LM	120	120	52



















Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall,

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate:
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL15105	LED 9W	90 0LM	230	80	37





The Application of Occasions

Suitable places: Wall.

Product Description

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.









GL15106 LED 9W

33/34



Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall.


- 1. Simple and easy appearance ,in line with contemporary aesthetic concept,
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.




		Lamp		Lumen	A	В	C
GL1510	07	LED 12V	٧	1200LM	200	220	70









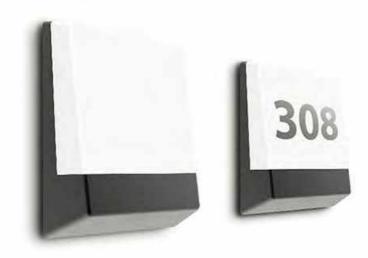

Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification



The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LEO.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	Α	В	C
GL15108	LED 10W	1040LM	160	210	58
















LED Spot Light

Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 ■BSCI ERP Certification







Silver Gray Dark Gray


Black




The Application of Occasions

Suitable places: localized lighting for building, bridge, sculpture etc.

- Classical industrial design, perfect aesthetic and practical union, patented appearance and structure technology.
- The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose: CREE, OSRAM or Philips Lumileds LED.
- 4. Use PC cover, the two light distribution, some lighting angel can be chose.
- 5. High efficiency constant current driver, ensure the light source is maximum used.
- Using silicone rubber leakproof structure design to ensure the high level of IP rating(IP65).











LED Spot Light

Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 185CI

ERP Certification






The Application of Occasions


Suitable places: localized lighting for building, bridge, sculpture etc.


Product Description

- Classical industrial design, perfect aesthetic and practical union, patented appearance and structure technology.
- The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose: CREE, OSRAM or Philips Lumileds LED.
- 4. Use PC cover, the two light distribution, some lighting angel can be chose.
- 5. High efficiency constant current driver, ensure the light source is maximum used.
- 6. Using siticone rubber leakproof structure design to ensure the high level of IPrating[IP65].



Silver Gray Dark Gray







Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium; PC

Body color

Certification

(€ RoHS ISO9001-2008 BSCI


ERP Certification










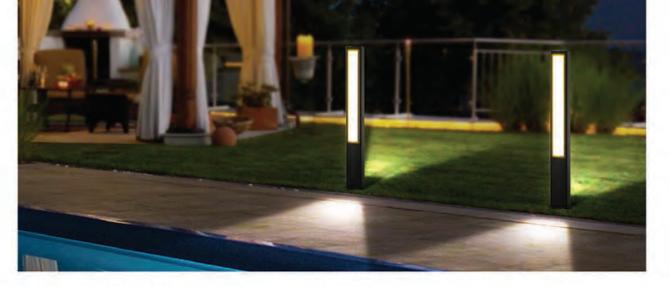

The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL15401	LED 10W	/ 1000LM	75	300	156
GL15402	LED 12W	/ 1400LM	75	500	156
GL15403	LED 12W	/ 1400LM	75	800	156
GL15404	LED 10W	/ 1000LM	105	250	156
GL15405	LED 10W	/ 1000LM	105	280	156









43/44



Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	c
GL15501	LED 9W	810LM	200	300	80
GL15502	LED 9W	810LM	200	500	80
GL15503	LED 9W	810LM	200	800	80
GL15504	LED 9W	810LM	200	112	80
	GL15502 GL15503	GL15501 LED 9W GL15502 LED 9W GL15503 LED 9W	GL15501 LED 9W 810LM GL15502 LED 9W 810LM GL15503 LED 9W 810LM	GL15501 LED 9W 810LM 200 GL15502 LED 9W 810LM 200 GL15503 LED 9W 810LM 200	GL15501 LED 9W 810LM 200 300 GL15502 LED 9W 810LM 200 500 GL15503 LED 9W 810LM 200 800





Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification








The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy , the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54,
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В
GL15601	LED 9W	810LM	90	300
GL15602	LED 9W	B10LM	90	500
GL15603	LED 9W	810LM	90	800
GL15604	LED 9W	810LM	140	272














Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.





	Lamp	Lumen	A	В
GL15701	LED 9W	810LM	100	300
GL15702	LED 9W	810LM	100	500
GL15703	LED 9W	810LM	100	800
GL15704	LED 9W	810LM	100	250



Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

PC, Diffuser

Body color

Dark Gray, Sitver Gray

Certification

€ RoHS ISO9001-2008 @BSCI

ERP Certification





The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IPS4.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL14101	LED 7W	550LM	210	60	32







Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Die-casting Aluminium; Diffuser PC

Body color

Black, Dark Gray, Silver Gray

Certification

C€ RoHS ISO9001-2008 @BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.





	Lamp	Lumen	A	В	C
GL14105	LED 7W	550LM	160	100	86
GL14106	LED 12W	1020LM	242	149	129
GL14108	GX53 11W		242	149	129













Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Die-casting Aluminium; Diffuser PC

Body color

Black, Dark Gray, Silver Gray

Certification


€ RoHS ISO9001-2008 BSCI

ERP Certification

The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL14109	LED 7W	550LM	160	100	184
GL14110	LED 7W	1020LM	242	149	239
GL14111	GX53 7W		242	149	239






















Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; Tempered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall,

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This wall lamp series uses LED.
- 5. The light diffusion PC : Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В
GL1420	B LED 3.5W	320LM	106	157
GL14204	LED 7W	640LM	106	238











Lighting Technology

Luminaires with LED or halogen lamp holder (GU10) with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium: Tempered glass: PC


Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy , the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This wall lamp series uses LED.
- 5. The light diffusion PC; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В
GL14205	LED 3.5W	320LM	106	157
GL14206	LED 7W	640LM	106	238
GL14207	GU10 35W		106	157
GL14208	GU10 2×35W		106	238



91





Lawn Light

Lighting Technology

Luminaires with E27/B22 lamp holder fixed with energy saving lighting Max.18W

Protection class

IP44

Material

Aluminium Alloy Diffuser PC

Body color

Black, Dark Gray, Silver Gray

Certification


(€ RoHS ISO9001-2008 -BSCI



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent,
- The lamp body is made of aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. Lamp light source fix with E27 / B22 energy saving lamp, Max. 18W.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP44.



	Lamp	A	В
GL14301	E27 18W	70	300
GL14302	E27 18W	70	500
GL14303	E27 18W	70	800
GL14304	E27 18W	106	250














Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

C€ RoHS ISO9001-2008 BSCI

ERP Certification






Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.





	Lamp	Lumen	A	В
GL14305	LED 7W	520LM	70	300
GL14306	LED 7W	520LM	70	500
GL14307	LED 7W	520LM	70	800
GL14308	LED 7W	520LM	106	250



LED PIR Lawn Light

Lighting Technology

Luminaires with LED and PIR with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP44

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP44.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	Α	В
GL14309	LED 7W	520LM	70	300
GL14310	LED 7W	520LM	70	500
GL14311	LED 7W	520LM	70	800
GL14312	LED 7W	520LM	106	250











Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification


€ RoHS ISO9001-2008 BSCI

ERP Certification

The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В
GL14401	LED 7W	520LM	70	300
GL14402	LED 7W	520LM	70	500
GL14403	LED 7W	520LM	70	800
GL14404	LED 7W	520LM	106	220
	GL14402 GL14403	GL14401 LED 7W GL14402 LED 7W GL14403 LED 7W	GL14401 LED 7W 520LM GL14402 LED 7W 520LM GL14403 LED 7W 520LM	GL14401 LED 7W 520LM 70 GL14402 LED 7W 520LM 70 GL14403 LED 7W 520LM 70












LED Lawn Light Lighting Technology Luminaires with LED with LED integral power supply unit Color temperature 2700K-6500K Protection class IP54 Material Aluminium extruded sections; Die-casting Aluminium; PC Body color Black, Dark Gray, Silver Gray Certification CE RoHS ISO9001-2008 € BSCI ERP Certification

The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept,
- 2. The product has the structure and appearance design patent.
- The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В
GL14405	LED 7W	520LM	70	300
GL14406	LED 7W	520LM	70	500
GL14407	LED 7W	520LM	70	800
GL14408	LED 7W	520LM	106	220







Silver Gray Dark Gray Blac





Silver Gray Dark Gray







Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy , the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	Α	В
GL14501	LED 7W	520LM	110	300
GL14502	LED 7W	520LM	110	500
GL14503	LED 7W	520LM	110	800
GL14504	LED 7W	520LM	100	310



Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

1P54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

C€ RoHS ISO9001-2008 \$ BSCI


ERP Certification



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	Α	В	C
GL14601	LED 7W	520LM	126	300	132
GL14602	LED 7W	520LM	126	500	132
GL14603	LED 7W	520LM	126	800	132
GL14604	LED 7W	520LM	160	110	132











Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; Tempered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification








The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This wall lamp series uses LED.
- 5. The light diffusion PC ; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL13101	LED 3.5W	260LM	150	60	58
GL13102	LED 7W	540LM	230	80	63









Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; Tempered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

C€ RoHS ISO9001-2008 BSCI

ERP Certification



The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy , the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This wall lamp series uses LED.
- 5. The light diffusion PC; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C	
GL13105	LED 3.5W	320LM	82	100	43	
GL13106	LED 7W	600LM	82	230	43	











Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

1P65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification




The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.






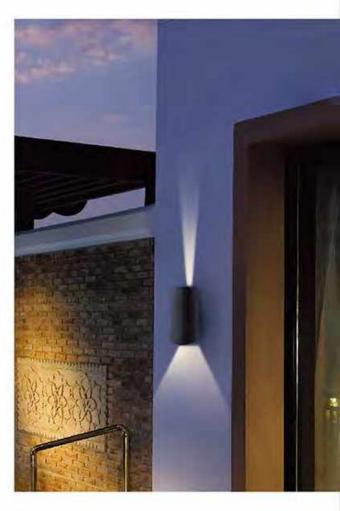

















Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; Tempered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification


The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This wall lamp series uses LED.
- 5. The light diffusion PC; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.

























Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium: Tempered glass: PC

Body color

Black, Dark Gray, Silver Gray

Certification

C€ RoHS ISO9001-2008 @BSCI

ERP Certification






The Application of Occasions

Suitable places: Buliding , WALL, pillar etc.

- 1. Classical industrial design, perfect aesthetic and practical union, patented appearance and
- 2. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose: CREE, OSRAM or Philips Lumileds LED.
- 4. Use PC cover, the two light distribution, some lighting angel can be chose.
- 5. High efficiency constant current driver, ensure the light source is maximum used.
- 6. using silicone rubber leakproof structure design to ensure the high level of IP rating[IP65].



	Lamp	Lumen	A	В	C
GL13301	LED 7W	540LM	220	123	90
GL13302	LED 3.5W	320LM	148	89	58



with LED integral power supply unit

PC, Diffuser, Die-casting Aluminium

€ RoHS ISO9001-2008 BSCI







The Application of Occasions


Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C	
GL13305	LED 12W	1200LM	258	98	90	

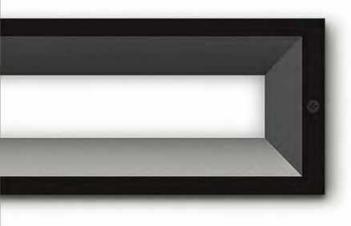



Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP65

Material

PC, Diffuser, Die-casting Aluminium

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall.


- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3 .The lamp body adopts high quality and Auti-UV ability outdoor's polycarbonate;
- 4. This lamp series uses LED.
- 5. The light diffusion PC wall; Protection grade to IP65.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	c	
GL13306	LED 12W	1200LM	250	98	90	



















Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Lens beam angle

10%25%

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; Tempered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

CE RoHS ISO9001-2008 ■BSCI **ERP Certification**






The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy , the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This wall lamp series uses LED.
- 5. The light diffusion PC; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



		Lamp	Lumen	Α	В	C
GL13	3403	LED 3.5W	320LM	65	170	92
GL13	3404	LED 7W	640LM	65	200	92











Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; Tempered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification



The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy , the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This wall lamp series uses LED.
- 5. The light diffusion PC; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL13405	LED 3.5W	320LM	65	170	92
GL13406	LED 7W	640LM	65	200	92













Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Lens beam angle

10%25%

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; Tempered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This wall lamp series uses LED.
- 5. The light diffusion PC : Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В
GL13503	LED 3.5W	320LM	106	157
GL13504	LED 7W	640LM	106	238














Lighting Technology

Luminaires with LED or halogen lamp holder[GU10] with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium: Tempered glass; PC


Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Wall.


- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy , the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This wall lamp series uses LED.
- 5. The light diffusion PC; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.





	Lamp	Lumen	A	В
GL13505	LED 3.5W	320LM	106	157
GL13506	LED 7W	640LM	106	238
GL13507	GU10 35W		106	157
GL13508	GU10 2×35W		106	238





Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Lens beam angle

10%250

Protection class

IP65

Material

Aluminium extruded sections; Die-casting Aluminium: Tempered glass: PC

Body color


Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification



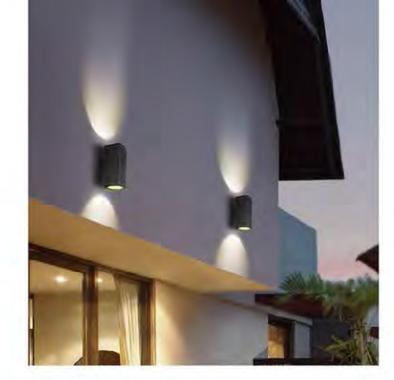

The Application of Occasions

Suitable places: Buliding, WALL, pillar etc.

- 1. Classical industrial design, perfect aesthetic and practical union, patented appearance and structure technology.
- 2. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose : CREE , OSRAM or Philips Lumileds LED.
- 4. Use PC cover, the two light distribution, some lighting angel can be chose.
- 5. High efficiency constant current driver, ensure the light source is maximum used.
- 6. using silicone rubber leakproof structure design to ensure the high level of IP rating(IP65).



	Lamp	Lumen	A	В
GL12601	LED 7W	600LM	170	200
GL12602	LED 12W	1200LM	170	250









Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Lens beam angle

10°/25°

Protection class

IP65

Material

Aluminium extruded sections; Die-casting Aluminium; Tempered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 185CI

ERP Certification





The Application of Occasions

Suitable places: Bullding, WALL, pillar etc.

- 1. Classical industrial design , perfect aesthetic and practical union, patented appearance and structure technology.
- 2. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose: CREE, OSRAM or Philips Lumileds LED.
- 4. Use PC cover, the two light distribution, some lighting angel can be chose.
- 5. High efficiency constant current driver, ensure the light source is maximum used.
- 6, using silicone rubber leakproof structure design to ensure the high level of IP rating[IP65].



	Lamp	Lumen	A	В
GL12603	LED 7W	600LM	170	200
GL12604	LED 12W	1200LM	170	250











Lighting Technology

Luminaires with LED with LED integral power supply unit

Cotor temperature

2700K-6500K

Lens beam angle

10°/25°

Protection class

IP54

Material

Die-casting Aluminium; Diffuser PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification





The Application of Occasions

Suitable places: Buliding , WALL, pillar etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corresion to extend service life.
- 4. The light diffusion PC cover, anti-aging, uv: Protection grade to IP54
- 5. Suitable light source: CREE LED and low power LED.
- 6. control Mode: Monochrome control; RGB inner control; RGB External control.
- 7. High efficiency constant current driver, ensure the light source is maximum used.





	Lamp	Lumen	A	В
WW12303	LED 7W	600LM	140	60
WW12304	LED 7W	600LM	140	60











Lighting Technology

Luminaires with CREE LED with LED integral power supply unit

Color temperature

2700K-6500K

Lens beam angle

10%250

Protection class

IP65

Material

Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 @BSCI

ERP Certification

The Application of Occasions

Suitable places: localized lighting for building, bridge, sculpture etc.

Product Description

- 1. Classical industrial design, perfect aesthetic and practical union, patented appearance and structure technology.
- 2. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose: CREE, OSRAM
- 4. Use PC cover, the two light distribution
- 5. High efficiency constant current drive
- 6. Using silicone rubber leakproof struct





M or Philips Lumileds LED.		Lamp	Lumen	Α	В
on, some lighting angel can be chose.	WW12104	LED 3.5W	190LM	66	100
ver, ensure the light source is maximum used.	WW12105	LED 3.5W	320LM	66	100
cture design to ensure the high level of IP rating[IP65].	WW12106	LED 3.5W	320LM	66	100
The state of the s	-		TO ME	TEM	China Co
	* 1	1	SEL LINE		











103/104



Lighting Technology

Luminaires with COB LED with LED integral power supply unit

Color temperature 2700K-6500K

Lens beam angle 10°/25°

Protection class IP65

Material

Die-casting Aluminium; Temered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification


The Application of Occasions


Suitable places: localized lighting for building, bridge, sculpture etc.

- Classical industrial design, perfect aesthetic and practical union, patented appearance and structure technology.
- The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose: CREE, OSRAM or Philips Lumileds LED.
- 4. Use PC cover, the two light distribution, some lighting angel can be chose.
- 5. High efficiency constant current driver, ensure the light source is maximum used.
- 6. Using silicone rubber leakproof structure design to ensure the high level of IP rating [IP65].











	Lamp	Lumen	A	В	C
WW12113	LED 7W	500LM	66	100	
WW12114	LED 7W	500LM	66	100	110
WW12115	LED 7W	500LM	66	100	278







Lighting Technology

Luminaires with CREE LED with LEO integral power supply unit

Color temperature

2700K-6500K

Lens beam angle

10%250

Protection class

IP65

Material

Die-casting Aluminium; Temered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification





The Application of Occasions

Suitable places: localized lighting for building, bridge, sculpture etc.

Product Description

- 1. Classical industrial design, perfect aesthetic and practical union, patented appearance and structure technology.
- 2. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose: CREE, OSRAM or Philips Lumileds LED.
- 4. Use PC cover, the two light distribution, some lighting angel can be chose,
- 5. High efficiency constant current driver, ensure the light source is maximum used.
- 6. Using silicone rubber leakproof structure design to ensure the high level of IP rating(IP65).



320LM 66

WW12107

WW12108

WW12109

LED 3.5W

LED 3.5W

LED 3,5W



100 278





Silver Gray Dark Gray Black





Lighting Technology

Luminaires with CREE LED with LED integral power supply unit

Color temperature

2700K-6500K

Lens beam angle

10°/25°

Protection class

IP65

Material

Die-casting Aluminium; Temered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification


CE RoHS ISO9001-2008 €BSCI


ERP Certification

The Application of Occasions

Suitable places: localized lighting for building, bridge, sculpture etc.

- 1. Classical industrial design, perfect aesthetic and practical union, patented appearance and structure technology.
- 2. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose: CREE, OSRAM or Philips Lumileds LED.
- 4. Use PC cover, the two light distribution, some lighting angel can be chose.
- 5. High efficiency constant current driver, ensure the light source is maximum used.
- 6. Using silicone rubber leakproof structure design to ensure the high level of IP rating(IP65).

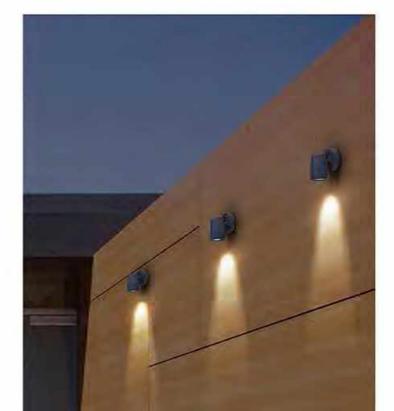



	Lamp	Lumen	A	В	C
WW12110	LED 3.5W	190LM	66	100	110
WW12111	LED 3.5W	320LM	66	100	110
WW12112	LED 3.5W	320LM	66	100	110









Lighting Technology

Luminaires with CREE LED with LED integral power supply unit

Color temperature

2700K-6500K

Lens beam angle 10%25%

Protection class

IP65

Material

Die-casting Aluminium; Temered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification










The Application of Occasions

Suitable places: localized lighting for building, bridge, sculpture etc.

- 1. Classical industrial design, perfect aesthetic and practical union, patented appearance and structure technology.
- 2. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose: CREE, OSRAM or Philips Lumileds LED.
- 4. Use PC cover, the two light distribution, some lighting angel can be chose.
- 5. High efficiency constant current driver, ensure the light source is maximum used.
- 6. Using silicone rubber leakproof structure design to ensure the high level of IP rating[IP65].





Lamp	Lumen	A	В
LED 7W	540LM	100	180
LED 9×1W	810LM	100	180
LED 6×2W	960LM	100	180
LED 9×2W	1280LM	100	180
	LED 7W LED 9×1W LED 6×2W	LED 7W 540LM LED 9×1W 810LM LED 6×2W 960LM	LED 7W 540LM 100 LED 9×1W 810LM 100 LED 6×2W 960LM 100











Lighting Technology

Luminaires with Bridgelux COB LED with LED integral power supply unit

Color temperature

2700K-6500K

Lens beam angle

Protection class

IP65

Material

Die-casting Aluminium; Ternered glass; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification



The Application of Occasions

Suitable places: localized lighting for building, bridge, sculpture etc.

- 1. Classical industrial design, perfect aesthetic and practical union, patented appearance and structure technology.
- 2. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 3. The LED can be chose: CREE, OSRAM or Philips Lumileds LED.
- 4. Use PC cover, the two light distribution, some lighting angel can be chose.
- 5. High efficiency constant current driver, ensure the light source is maximum used.
- 6. Using silicone rubber leakproof structure design to ensure the high level of IP rating(IP65).



	Lamp	Lumen	A	В	
WW12205	COB LED 1×12W	920LM	100	180	
WW12206	COB LED 1×18W	1280LM	100	180	









Lawn Light

Lighting Technology

Luminaires with E27/822 lamp holder fixed with energy saving lighting Max.18W

Protection class

IP44

Material

Aluminium Altoy; Diffuser PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body is made of aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. Lamp light source fix with E27 / B22 energy saving lamp, Max. 18W.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP44.



Lamp	A	В
E27 18W	72	300
E27 18W	72	500
E27 18W	72	800
E27 18W	107	250
	E27 18W E27 18W E27 18W	E27 18W 72 E27 18W 72 E27 18W 72







Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IPS4

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification




The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

Product Description

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В
GL13701	LED 7W	520LM	110	300
GL13702	LED 7W	520LM	110	500
GL13703	LED 7W	520LM	110	800
GL13704	LED 7W	520LM	107	200



117/118











Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

1P54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В
GL13801	LED 7W	520LM	183	300
GL13802	LED 7W	520LM	183	500
GL13803	LED 7W	520LM	183	800
GL13804	LED 7W	520LM	183	73



Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 \$85CI

ERP Certification






The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.




	Lamp	Lumen	A	В
GL12101	LED 7W	520LM	235	300
GL12102	LED 7W	520LM	235	500
GL12103	LED 7W	520LM	235	800
GL12104	LED 7W	520LM	235	250











Lighting Technology

Luminaires with LED or GX53 lamp holder with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

1P54

Material

Aluminium extruded sections: Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

Silver Gray Dark Gray Black

€ RoHS ISO9001-2008 \$35CI

ERP Certification






The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lan	np	Lumen	A	В
GL12201	LED	9W	820LM	150	300
	GX53	11W		150	300
GL12202	LED	9W	820LM	150	500
	GX53	11W		150	500
GL12203	LED	9W	820LM	150	800
	GX53	11W		150	800







Lighting Technology

Luminaires with LED or GX53 lamp holder with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	c
GL12204	LED 9W	820LM	150	500	260
	GX53 11V	/	150	500	260
GL12205	LED 9W	820LM	150	800	560
	GX53 11V	1	150	800	560
GL12206	LED 9W	820LM	200	250	130
	GX53 11V	/	200	250	130
GL12207	LED 9W	820LM	150	200	100
	GX53 11V	/	150	200	100











Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class IP54

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI ERP Certification






The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver , ensure the light source is maximum used.



	Lamp	Lumen	Α	В
GL12301	LED 9W	820LM	120	300
GL12302	LED 9W	820LM	120	500
GL12303	LED 9W	820LM	120	800





Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy , the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54,
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL12304	LED 9W	820LM	120	500	260
GL12305	LED 9W	820LM	120	800	560
GL12306	LED 9W	820LM	170	200	100
GL12307	LED 9W	820LM	120	200	100














The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- The lamp body is made of aluminum alloy, the surface is coated with outdoor used powder, doubte anti-corrosion to extend service life.
- 4. Lamp light source fix with E27 / B22 energy saving lamp ,Max. 23W.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP44.



	Lamp	A	В
GL12401	E27 23W	120	300
GL12402	E27 23W	120	500
GL12403	E27 23W	120	800
GL12404	E27 23W	120	250








Silver Gray Dark Gray







Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

Product Description

- 1. Simple and easy appearance ,in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.







	Lamp		Lumen	A	В
GL12501	LED 9W	Two side	770LM	120	300
GL12502	LED 9W	Two side	770LM	120	500
GL12503	LED 9W	Two side	770LM	120	800
GL12504	LED 9W	Two side	770LM	170	250
GL12505	LED 9W	Four side	770LM	120	300
GL12506	LED 9W	Four side	770LM	120	500
GL12507	LED 9W	Four side	770LM	120	800
GL12508	LED 9W	Four side	770LM	170	250

133/134



Lighting Technology

Luminaires with LED or GX53 lamp holder with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification



Product Description

The Application of Occasions Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. Many light sources can be chose, LED or GX53.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



135/136

	Lamp	Lumen	A	В
GL11201	LED 9W	820LM	125	300
	GX53 11W		125	300
GL11202	LED 9W	820LM	125	500
	GX53 11W		125	500
GL11203	LED 9W	820LM	125	800
	GX53 11W		125	800



















Lighting Technology

Luminaires with LED or GX53 lamp holder with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, doubte anti-corrosion to extend service life.
- 4. Many light sources can be chose, LED or GX53.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	C
GL11204	LED 9W	820LM	125	500	260
	GX53 11W		125	500	260
GL11205	LED 9W	820LM	125	800	560
	GX53 11W		125	800	560
GL11206	LED 9W	820LM	170	200	100
	GX53 11W		170	200	100
GL11207	LED 69W	820LM	125	200	100
	GX53 11W		125	200	100







Lighting Technology

Luminaires with E27 or B22 lamp holder fixed with energy saving lighting Max.23W

Protection class

IP44

Material

Aluminium alloy: Diffuser PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification







The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body is made of aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. Lamp light source fix with E27 / B22 energy saving lamp ,Max. 23W.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP44.





	Lamp	A	В
GL11304	E27 23W	125	300
GL11305	E27 23W	125	500
GL11306	E27 23W	125	800
GL11307	E27 23W	170	250











Silver Gray Dark Gray Black

Lawn Light

Lighting Technology

Luminaires with E27 or B22 lamp holder fixed with energy saving lighting Max.23W

Protection class

1P44

Material

Atuminium alloy; Diffuser PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- The lamp body is made of aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. Lamp light source fix with E27 / B22 energy saving lamp ,Max. 23W.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP44.



	Lamp	A	В
GL11401	E27 23W	175	300
GL11402	E27 23W	175	500
GL11403	E27 23W	175	800
GL11404	E27 23W	175	200





Lawn Light

Lighting Technology

Luminaires with E27 or B22 lamp holder fixed with energy saving lighting Max.23W

Protection class

IP44

Material

Aluminium alloy; Diffuser PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification





The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body is made of aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. Lamp light source fix with E27 / B22 energy saving lamp ,Max. 23W.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP44.



Lamp	Α	В
E27 23W	175	300
E27 23W	175	500
E27 23W	175	800
E27 23W	175	200
	E27 23W E27 23W E27 23W	E27 23W 175 E27 23W 175 E27 23W 175













Lighting Technology

Luminaires with LED or GX53 lamp holder with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. Many light sources can be chose, LED or GX53,
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver , ensure the light source is maximum used.



	Lamp	Lumen	A	В	
GL11501	LED 7W	520LM	100	300	
	GX53 11W		100	300	
GL11502	LED 7W	520LM	100	500	
	GX53 11W		100	500	
GL11503	LED 7W	520LM	100	800	
	GX53 11W		100	800	











Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

IP54

Material

Aluminium extruded sections; Die-casting Aluminium: PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI


ERP Certification



The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn tamp series uses LED.
- 5. The light diffusion PC cover, anti-aging and UV; Protection grade to IPS4.
- 6. High efficiency constant current driver, ensure the light source is maximum used.




	Lamp	Lumen	A	В	C
GL11601	LED 7W	520LM	125	800	560
GL11602	LED 7W	520LM	125	800	360
GL11603	LED 7W	520LM	125	800	160

















Lighting Technology

Luminaires with LED with LED integral power supply unit

Color temperature

2700K-6500K

Protection class

1P54

Material

Aluminium extruded sections: Die-casting Atuminium; PC

Body color

Black, Dark Gray, Silver Gray

Certification

€ RoHS ISO9001-2008 BSCI

ERP Certification






The Application of Occasions

Suitable places: Lawn, Garden, Park etc.

- 1. Simple and easy appearance, in line with contemporary aesthetic concept.
- 2. The product has the structure and appearance design patent.
- 3. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life.
- 4. This lawn lamp series uses LED.
- 5. The light diffusion PC cover, anti aging and UV; Protection grade to IP54.
- 6. High efficiency constant current driver, ensure the light source is maximum used.



	Lamp	Lumen	A	В	С
GL11604	LED 7W	520ML	170	200	100
GL11605	LED 7W	520ML	125	500	400
GL11606	LED 7W	520ML	125	500	260
GL11607	LED 7W	520ML	125	500	160
GL11608	LED 7W	520ML	125	500	160
GL11609	LED 7W	520ML	125	300	130
GL116010	LED 7W	520ML	125	300	160
GL116010	LED 7W	520ML	125	300	160